




HRX 12-7 (12V 7AH/20hr)

Product Image Product Dimensions

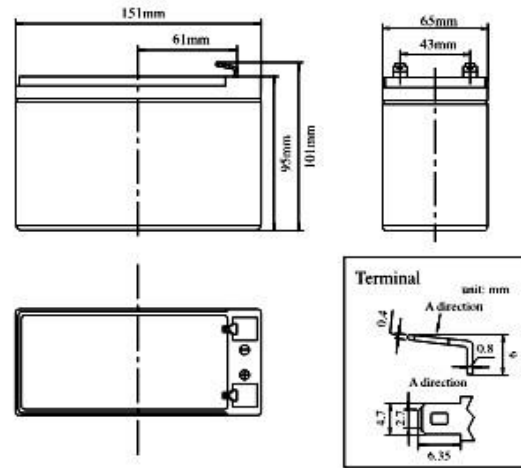

Characteristics

Packaging

Nominal Voltage		12V
Nominal Capacity (20 hour rate)		7Ah
Capacity 25°C (77 °F)	10 hour rate (0.67A)	6.7Ah
	5 hour rate (1.25A)	6.25Ah
	1 hour rate (4.62A)	4.62Ah
Internal Resistance	Full Charged Battery 25°C	≤22m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 2.1A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 2.1A Voltage 14.4-15.0V

Battery Dimensions	Length	151mm
	Width	65mm
	Height	95mm
	Total Height	101mm
Box Dimensions	Length	364mm
	Width	330mm
	Height	130mm
Quantity Per Box		10 pcs per box
Net weight Per Cell		2.0 kg±100g
Net weight Per Box		20.0kg
Gross Weight		20.5kg

Constant Current Discharge (Amperes) at 25 °C (77°)

F

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	16.0	11.7	9.97	8.46	6.17	4.52	3.60	2.14	1.60	1.30	1.10	0.95	0.756	0.626	0.343
1.80V/cell	19.2	13.7	11.3	9.20	6.65	4.80	3.83	2.24	1.66	1.35	1.14	0.99	0.783	0.653	0.350
1.75V/cell	21.5	14.9	12.0	9.70	6.92	4.99	3.98	2.31	1.71	1.38	1.16	1.01	0.795	0.663	0.357

1.70V/cell	23.4	15.9	12.8	10.2	7.18	5.12	4.05	2.36	1.75	1.41	1.19	1.03	0.812	0.672	0.361
1.65V/cell	25.5	16.8	13.4	10.6	7.43	5.28	4.17	2.40	1.77	1.43	1.21	1.04	0.823	0.680	0.365
1.60V/cell	26.8	17.6	13.8	10.9	7.64	5.42	4.26	2.46	1.81	1.46	1.23	1.06	0.837	0.690	0.371
Constant Power Discharge (Watts/cell) at 25 °C (77° F)															
F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.3	22.3	19.2	16.4	12.0	8.86	7.09	4.23	3.17	2.59	2.20	1.91	1.52	1.26	0.694
1.80V/cell	35.9	25.8	21.5	17.7	12.9	9.37	7.52	4.42	3.30	2.69	2.27	1.97	1.57	1.31	0.704
1.75V/cell	39.8	28.0	22.8	18.6	13.4	9.72	7.79	4.55	3.37	2.74	2.31	2.00	1.59	1.33	0.716
1.70V/cell	42.8	29.5	24.0	19.3	13.8	9.89	7.88	4.61	3.42	2.78	2.34	2.03	1.61	1.33	0.718
1.65V/cell	45.7	30.7	24.8	19.8	14.1	10.1	8.02	4.65	3.45	2.80	2.36	2.05	1.62	1.34	0.720
1.60V/cell	47.0	31.5	25.1	20.1	14.3	10.3	8.13	4.73	3.50	2.83	2.39	2.07	1.63	1.35	0.728



FUJIAN HUARUNXIN POWER TECHNOLOGY CO.,LTD




HRX 12-7
(12V 7AH/20hr)

Temperature Effects in Relation to Battery Capacity


Discharge Characteristics

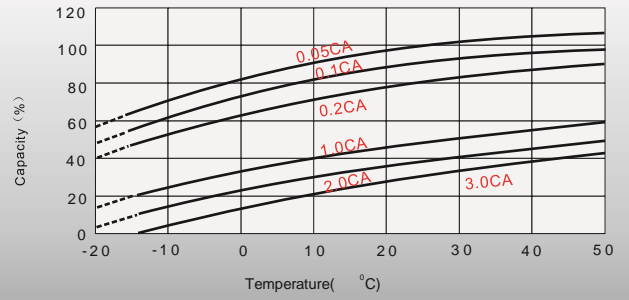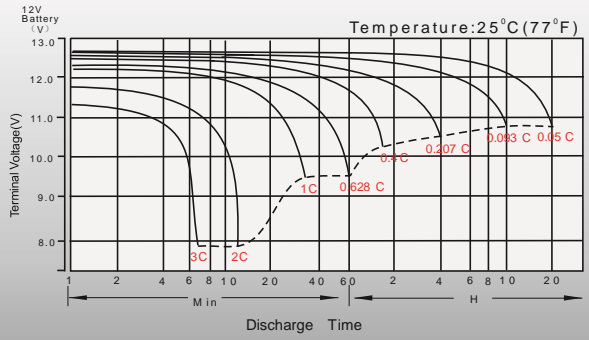


Float Charging Characteristics

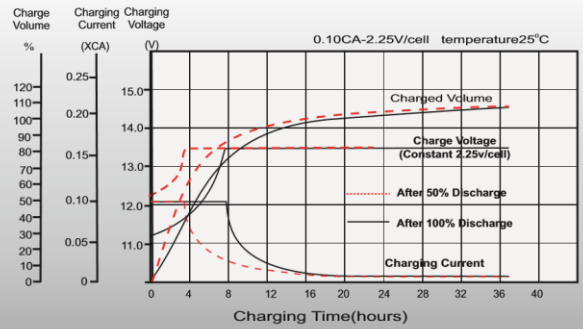


Effect of Temperature on Long Term Float Life

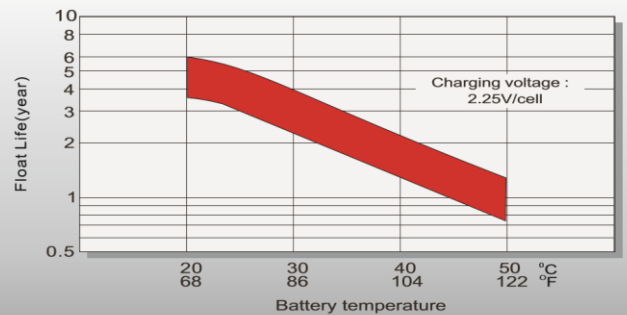

Self Discharge Characteristics

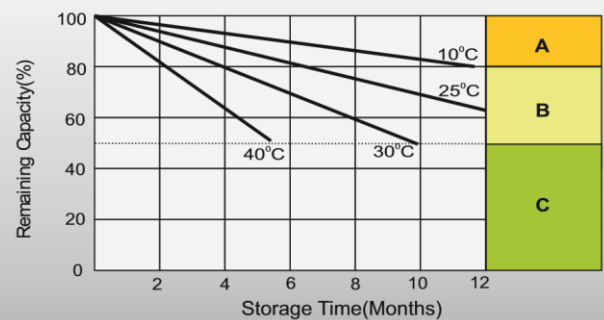

Cycle Life in Relation to Depth of Discharge

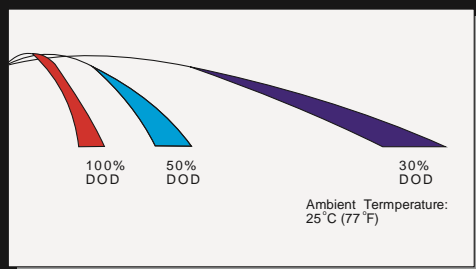

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid

FUJIAN HUARUNXIN POWER TECHNOLOGY CO.,LTD